

PV Disconnect 1000-40-5

Five string connection box with DC Disconnect Switch

ORDER INFORMATION

- Item no.: 19-000115
- Product name: PV Disconnect 1000-40-5

FEATURES

- Simple and cost effective unit to connect up to five module strings
- Includes an appropriate DC rated disconnect switch
- Designed for PSk2 / PSk pump systems
- Used as part of a professional system installation



TECHNICAL DATA

- Wiring of up to 5 PV-strings in parallel
- DC rated disconnect switch enclosed
- Enclosure class IP 54
- Meets the requirements for CE

PV Disconnect 1000-40-5

Max. voltage	1,000 V DC (Uoc) 880 V DC (Ump)
Max. current per string	40 A
Max. total current	40 A
Max. no. of strings	5
String cable size	4 - 10mm ²
Output cable size	4 - 16mm ²

RELATED PRODUCTS


PV Combiner 1000-125-4

- Connection Box for parallel wiring of two or more PV Disconnect 1000-40-5
- Item no.: 19-000116


PV Protect 1000-125

- Surge protection device for PV systems
- Item no.: 19-000117

DIMENSION/WEIGHT [mm]

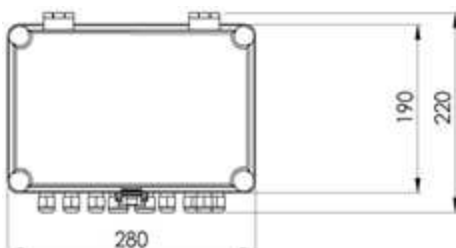

PG cable glands
(2x PG11 10x M16)



Net. Weight: 2,50kg

BERNT LORENTZ GmbH & Co. KG
 Siebenstuecken 24, 24558 Henstedt-Ulzburg, Germany
 Tel +49 (0)4193 8806-700, www.lorentz.de

Sun. Water. Life.